

PAVERS

Decorative

Technical Guide



TABLE OF CONTENTS

SECTION		PAGE NUMBER
Paver Sizing & Specification		2 - 4
	100mm x 100mm Paver	2
	100mm x 200mm Paver	
	200mm x 200mm Paver	
	400mm x 400mm Paver	3
	600mm x 600mm Paver	
	Coping Bullnose Paver	
	1000mm x 300mm Paver	4
Installation Notes		5
	Flexible Paving Installation	5
	Rigid Paving Installation	
	SANS Compliance	
Colour Variations		6
Different Laying Patterns & Colours		7 - 9
	Grey, Charcoal & Red Colours & Patterns	7
	Grey, Wheat & Tan Colours & Patterns	8
	Pool & Garden Patterns	9


100 x 100 PAVER (TEXTURED)

SPECIFICATIONS

3D Image



Top View



- Product Code: 100/100
- Length: 100mm
- Width: 100mm
- Height: 50mm
- Per m²: 100

hand cast concrete to ensure durability and sustainability

Residential & commercial use for driveways, garden paving, walkways, parking areas, paved roads. (Flexible Installation)


100 x 200 PAVER (TEXTURED)

SPECIFICATIONS

3D Image



Top View



- Product Code: 200/100
- Length: 200mm
- Width: 100mm
- Height: 50mm
- Per m²: 50

hand cast concrete to ensure durability and sustainability

Residential & commercial use for driveways, garden paving, walkways, parking areas, paved roads. (Flexible Installation)


200 x 200 PAVER (TEXTURED)

SPECIFICATIONS

3D Image



Top View

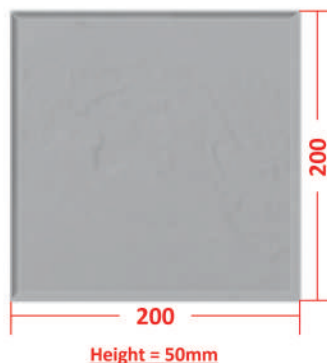

- Product Code: 200
- Length: 200mm
- Width: 200mm
- Height: 50mm
- Per m²: 25

hand cast concrete to ensure durability and sustainability

Residential & commercial use for driveways, garden paving, walkways, parking areas, paved roads. (Flexible Installation)


400 x 400 PAVER (TEXTURED)

SPECIFICATIONS

3D Image



Top View



- Product Code: 400
- Length: 400mm
- Width: 400mm
- Height: 50mm
- Per m²: 6,25

hand cast concrete to ensure durability and sustainability

Residential & commercial use for driveways, garden paving, walkways, parking areas, paved roads. (Rigid Installation)


600 x 600 PAVER (SMOOTH)

SPECIFICATIONS

3D Image



Top View

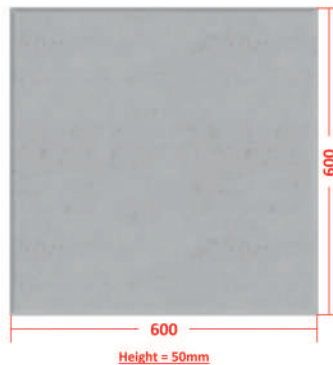

- Product Code: 600
- Length: 600mm
- Width: 600mm
- Height: 50mm
- Per m²: 2,7

hand cast concrete to ensure durability and sustainability

Residential & commercial use for garden paving & walkways. (Rigid Installation)


COPING BULLNOSE PAVER (TEXTURED)

SPECIFICATIONS

3D Image



Top View



- Product Code: COPING
- Length: 200mm
- Width: 150mm
- Height: 50mm
- Per running meter: 6,5

hand cast concrete to ensure durability and sustainability.

Residential & commercial use for garden paving & walkways. (Rigid Installation)


800 x 400 PAVER (SMOOTH)

SPECIFICATIONS

3D Image



Top View

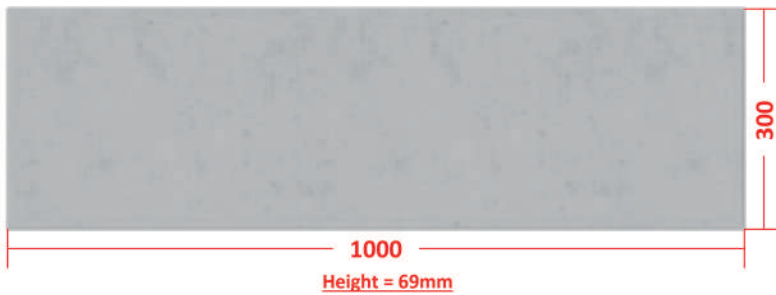

- Product Code: 1000
- Length: 1000mm
- Width: 300mm
- Height: 69mm
- Per m²: 3

hand cast concrete to ensure durability and sustainability.

Residential & commercial use for garden paving & walkways. (Rigid Installation)


INSTALLATION & CONSTRUCTION NOTES

FLEXIBLE PAVING INSTALLATION:

This is the most typical type of installation. It needs to be maintained regularly and installed correctly in order to last.

It is recommended that there is a set standard of 5mm joint gaps.

1. Mark off and dig away the surface area of area to be paved, +/-250mm depth below the final level.
2. Compacted base of G5 material on stable sub-base.
3. Fill in bedding sand to 50mm, it is important to compact the sand evenly.
4. Lay pavers to personal pattern preference.
5. With this method, it is not necessary to grout pavers to allow for drainage.

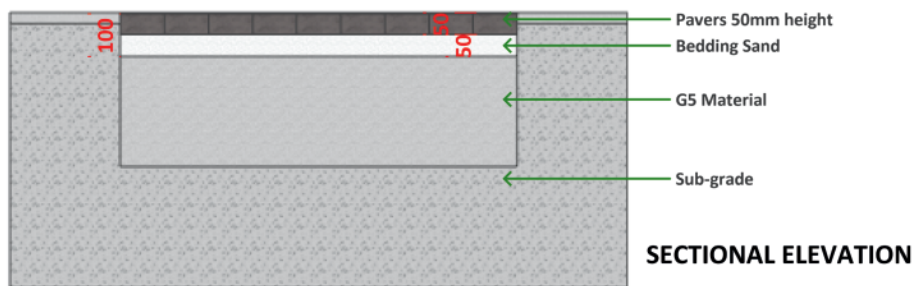


RIGID PAVING INSTALLATION:

To create a solid surface with no room for movement.

It is recommended that there is a set standard of 5mm joint gaps.


1. Mark off and dig away the surface area of area to be paved, 100mm depth below the final level.
2. Compacted base of G5 material on stable sub-base.
3. Fill in concrete to a height of 50mm.
4. Lay pavers to personal pattern preference.
5. With this method it is important to have a subtle fall to a drainage system.

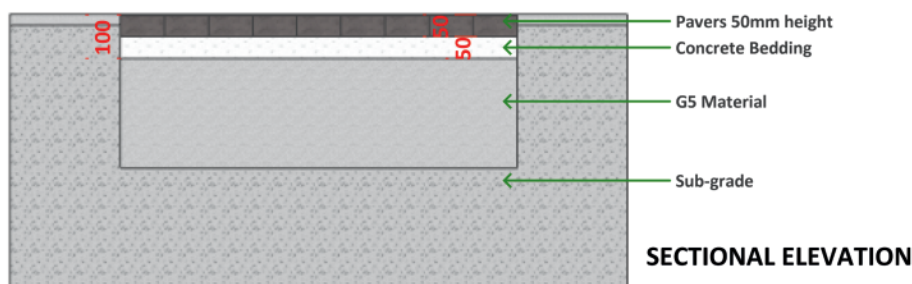


SANS COMPLIANCE:

- TFSD Concrete Products has the pavers tested and tests batches of the manufactured pavers.
- Pavers comply with SANS specifications which are tested by means of tensile splitting.
- Pavers comply with abrasive resistance specifications. This means that pavers are only allowed a specified amount of "damage" due to friction.
- Blocks are allowed only minimal dimensional variances.
- The visual quality of the blocks should be acceptable.
- A customer has recourse if necessary when it comes to the quality of paving blocks.


COLOUR VARIATIONS

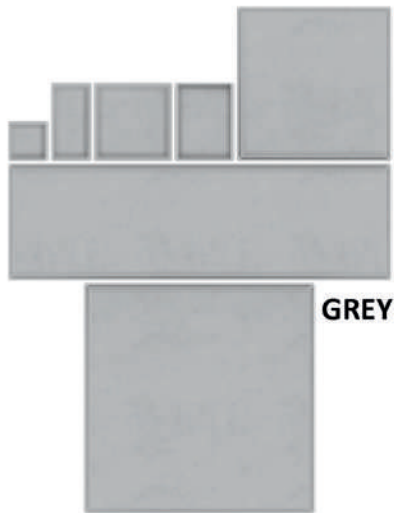


GREY

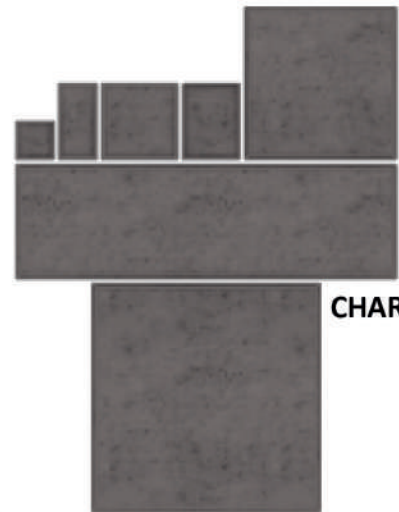

CHARCOAL

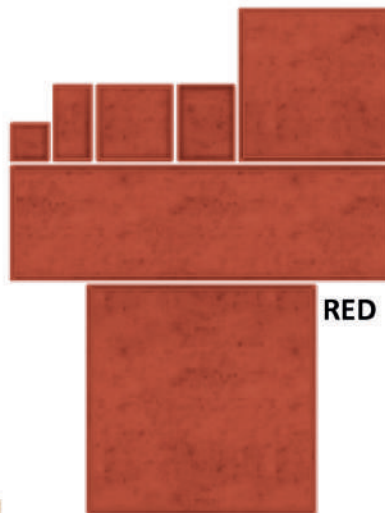

RED

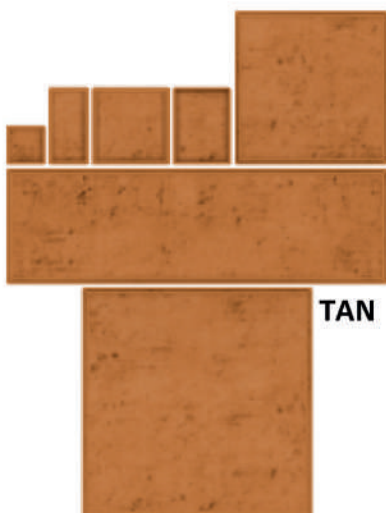

TAN



WHEAT

Please note that all our colour ranges that are not GREY (stock standard) are made to order. Colour ranges are available for all pavers.



